

WINDOWS

SERIES 8000

SINGLE HUNG WINDOW



- Tested to AAMA CW60
- Factory Glazed
- Thermally Insulated
- NFRC Certified
- U-Factors as Low as 0.34
- 4-1/2" (114 mm)
Deep Frame to Match
Typical Building Conditions
- Choice of Block or Fin Frame
- 1" (25 mm) Glazing
- Class 5 Balance for Ease
of Operation
- Accessories Like Screens,
Mulling Bars, Subsills, Head
and Jamb Channels are Available
- Available in an Array of Architectural
Coatings and Anodized Finishes
- Complimented by the
8200 Horizontal Sliding and
8100 Fixed Windows
- Made in the USA



The 8000 Single Hung Window uses a Class 5 Balance for smooth operation. The 4-1/2" (114 mm) deep frame is designed to match typical building conditions, including our entrances and storefront.

An efficient thermally insulated frame accepts 1" (25 mm) glazing, with extruded pulls at the interlock and bottom rail. The window features a self-locking latch.




CRL
US ALUMINUM
usalum.com • crlaurence.com
crl-arch.com

US ALUMINUM

SERIES 8000 SINGLE HUNG WINDOW

TYPICAL DETAILS

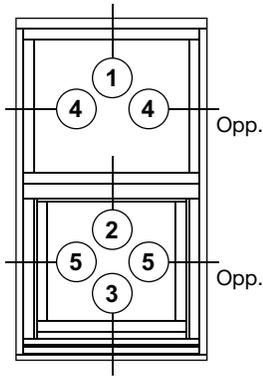


Maximum Frame Size
56" x 91" (1422 x 2311 mm)

A complete set of details
in DWG format is available
at www.usalum.com



NOTE:
• 1" (25 mm) Glazing Shown

Meets or exceeds specifications:

- AAMA/WDMA/CSA 101/1.S.2/A 440-08
 - ASTM E 283-04
 - ASTM E 330-02
 - ASTM E 331-00
 - AAMA 1503
- NFRC
 - NFRC 100-2004
 - NFRC 200-2004
 - NFRC 500-2004

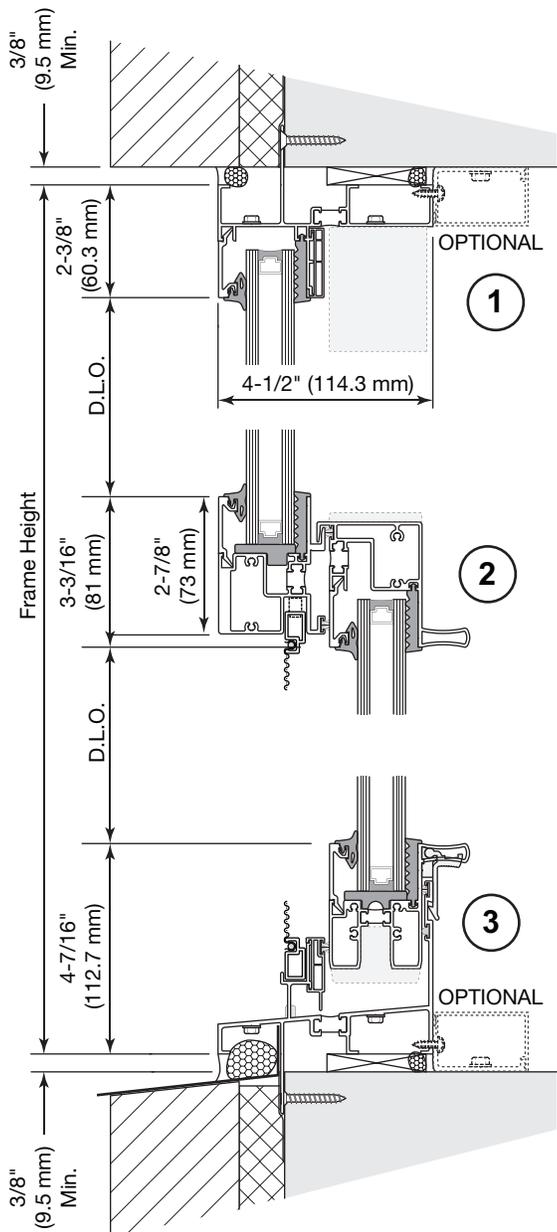

Fin Frame
Installation
Method Shown

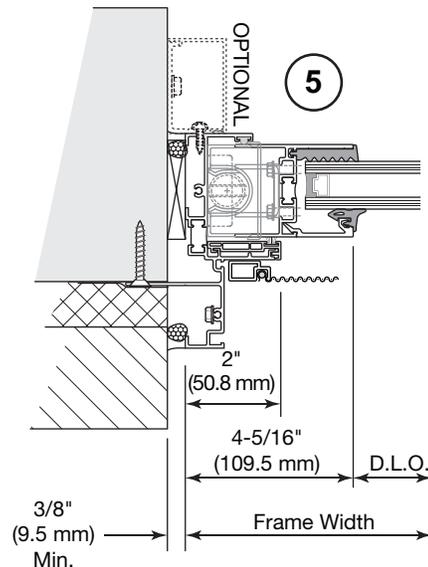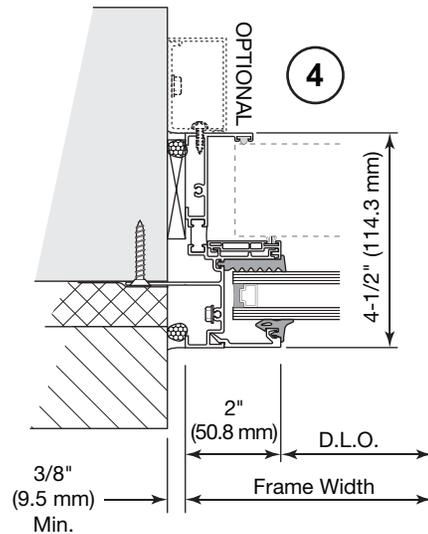

NOT TO SCALE