



GLASS WINDSCREEN SYSTEMS FABRICATION GUIDELINES

For Core Mount and Surface Mount Windscreen Clamps



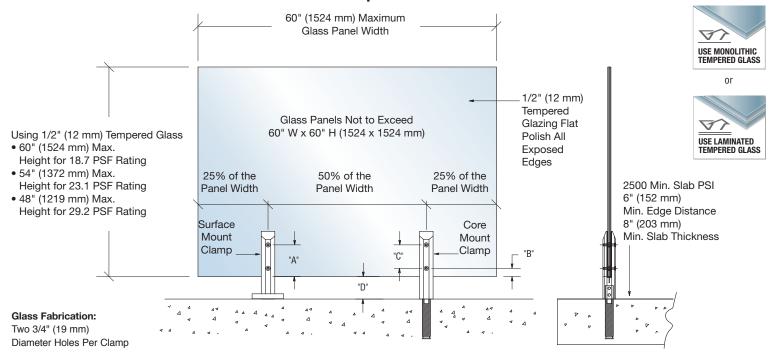

Diameter Holes Per Clamp

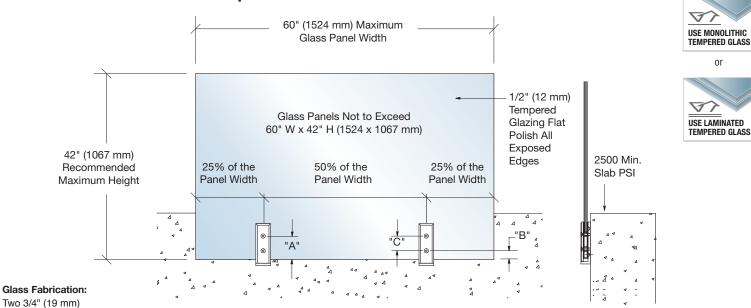

CAT. NO.	"A"	"B"	"C"	"D"
AFWC1/AFWC6	4-1/2" (114 mm)	1-1/8" (29 mm)	3-3/8" (86 mm)	3-1/4" (83 mm)
AFWC2/AFWC7	3-1/8" (79 mm)	1-3/16" (30 mm)	1-15/16" (49 mm)	N/A
AFWC3/AFWC8	3-3/8" (86 mm)	1-7/16" (37 mm)	1-7/8" (48 mm)	2-7/8" (73 mm)
AFWC1SBS/AFWC1SPS	4-1/2" (114 mm)	1-1/8" (29 mm)	3-3/8" (86 mm)	3-3/8" (86 mm)
AFWC4SBS/AFWC4SPS	3-5/8" (92 mm)	1-1/8" (29 mm)	2-1/2" (64 mm)	2-1/4" (57 mm)
				, ,

crlaurence.com • usalum.com • crl-arch.com