# HURRICANE (IMPACT) RESISTANT ENTRANCES



Series DH-350 Hurricane Resistant
Out-Swing Medium Stile Entrance Door (Exterior View)



Series DH-350 Hurricane Resistant In-Swing Medium Stile Entrance Door (Exterior View)



FORMERLY DELTA DOORS

# SERIES DH-350 STORM FRONT™ DOORS

The DH-350 is a High Performance Hurricane Resistant Storefront Entrance Door designed for all commercial entrance applications including retail space, hotels, condominiums, office buildings, institutional facilities, and industrial structures. The DH-350 complies with the stringent requirements of Florida's Miami-Dade County Building Codes, making it the top choice for installation in areas ravished by hurricanes. The DH-350 is intended to be installed in punched openings or as a liner frame within other U.S.Aluminum Impact Framing Systems.



#### **Standard Features:**

- Factory Pre-Glazed With Structural Silicone
- Standard Panel Sizes: 36" x 84" (914 x 2137 mm) for Single Doors

72" x 84" (1829 x 2137 mm) for Pairs of Doors 36" x 96" (914 x 2438 mm) for Single Doors 72" x 96" (1829 x 2438 mm) for Pairs of Doors

- · Heavy-Duty Commercial Grade
- 8" (203.2 mm) Bottom Rail
- 1-1/2 Pair of 4" x 4-1/2" (101.6 x 114.3 mm) Mortised Aluminum Butt Hinges with Non-Removable Stainless Steel Hinge Pins for 3070 / 6070 Doors
- Two Pairs of 4" x 4-1/2" (101.6 x 114.3 mm) Mortised Aluminum Butt Hinges with Non-Removable Stainless Steel Hinge Pins for 3080 / 6080 Doors
- Double Rows of Weather Seals
- Three-Point Locking System with Cylinder and Thumbturn Included
- Standard Push/Pull Set 1" (25 mm) Round US28 Finish
- Non-Removable Interior Glass Stops


#### **Options:**

- Custom Finishes: AAMA 2605 Compliant Painted Finishes
- · Concealed Overhead Door Closers
- Exposed Heavy-Duty Door Closer for Coastal and High Wind Zones
- Glass Tint Available as Selected by the Architect/Owner
- CRL Jackson Concealed Panic Exit Device
- Open for Glazing by Customer
- Glass: Large Missile 9/16" (14 mm) Laminated Impact Glass 0.090" Interlayer SGP by Dupont; Laminated Glass Composition: 1/4" (6 mm) Heat-Strengthened Laminated Glass with 0.090" SentryGlas® Plus Interlayer and 1/4" (6 mm) Heat-Strengthened Glass


# SERIES DH-350 STORM FRONT™ **DOOR FRAMES**

## **Out-Swing Door Frames**

UP/OVER FRAMES FOR SINGLE AND PAIRS	HARDWARE	CAT. NO.*
Frame without Transom 39-1/2" x 86" or 39-1/2" x 98"	3 Butt Hinges 3-Point Lock 36" x 84" D.O.	DH350A10FN
	3 Butt Hinges Jackson Exit Device 36" x 84" D.O.	DH350A20FN
	4 Butt Hinges 3-Point Lock 36" x 96" D.O.	DH350A11FN
	4 Butt Hinges Jackson Exit Device 36" x 96" D.O.	DH350A21FN
Frame without Transom 75-1/2" x 86" or 75-1/2" x 98"	3 Butt Hinges 3-Point Lock 72" x 84" D.O.	DH350A10FNP
	3 Butt Hinges Jackson Exit Device 72" x 84" D.O.	DH350A20FNP
	4 Butt Hinges 3-Point Lock 72" x 96" D.O.	DH350A11FNP
	4 Butt Hinges Jackson Exit Device 72" x 96" D.O.	DH350A21FNP




TRANSOM Frames for Single and Pairs	HARDWARE	CAT. NO.*
Frame with Transom 39-1/2" x 120"	3 Butt Hinges 3-Point Lock 36" x 84" D.O.	DH350A10FT
	3 Butt Hinges Jackson Exit Device 36" x 84" D.O.	DH350A20FT
	4 Butt Hinges 3-Point Lock 36" x 96" D.O.	DH350A11FT
	4 Butt Hinges Jackson Exit Device 36" x 96" D.O.	DH350A21FT
Frame with Transom 75-1/2" x 120"	3 Butt Hinges 3-Point Lock 72" x 84" D.O.	DH350A10FTF
	3 Butt Hinges Jackson Exit Device 72" x 84" D.O.	DH350A20FTF
	4 Butt Hinges 3-Point Lock 72" x 96" D.O.	DH350A11FTF
	4 Butt Hinges Jackson Exit Device 72" x 96" D.O.	DH350A21FTF

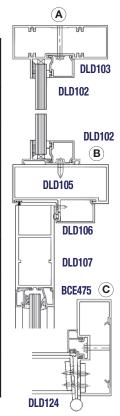


### **In-Swing Door Frames**

UP/OVER FRAMES FOR SINGLE AND PAIRS	HARDWARE	CAT. NO.*
Frame without Transom 39-1/2" x 86" or 39-1/2" x 98"	3 Butt Hinges 3-Point Lock 36" x 84" D.O.	DH3501NA10F
	4 Butt Hinges 3-Point Lock 36" x 96" D.O.	DH3501NA11FN
C D	3 Butt Hinges 3-Point Lock 72" x 84" D.O.	DH3501NA10FNP
Frame without Transom 75-1/2" x 86" or 75-1/2" x 98"	4 Butt Hinges 3-Point Lock 72" x 96" D.O.	DH3501NA11FNP

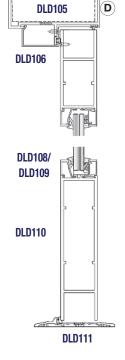

5"

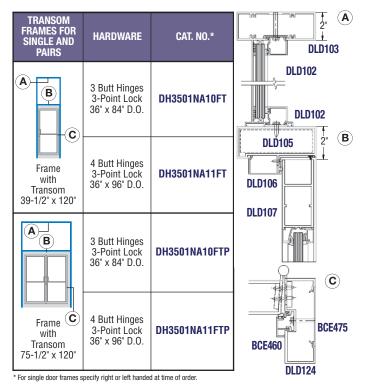

NOT TO SCALE AVDB4117\_DH-350\_05.13\_no NOA#

<sup>\*</sup> For single door frames specify right or left handed at time of order.