


CURTAIN WALLS

SERIES 2200 CURTAIN WALL









- 2" (51 mm) Face Dimension
- 2-7/8", 4", and 5" (73, 102, and 127 mm) Back Member Depths
- Exterior Glazed
- Injection Molded Water Deflectors
- Thermally Improved
- Pressure Bar Type Glazing
- No Exposed Fasteners
- Shear Block Assembly

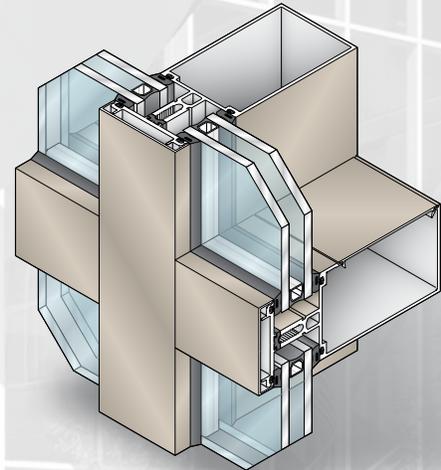

The Series 2200 Curtain Wall System offers a reduced sightline for low to mid-rise applications where exterior glazing is desired. Complementing the efficiency of insulating glass, Series 2200 Curtain Wall is thermally improved by a continuous thermal spacer interlocked within the vertical and horizontal pressure plates. Dual colors can be achieved by specifying different finishes for the exterior face covers and interior mullions. A unique split vertical mullion for straight-in installation of each bay, special perimeter members for easy anchorage, and the option to shop install is achieved with screw spline assembly.

SERIES 2200 TYPICAL DETAILS

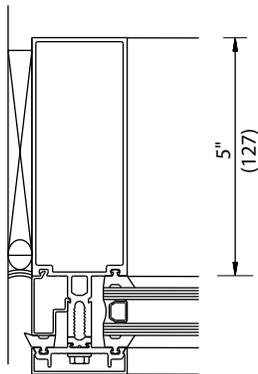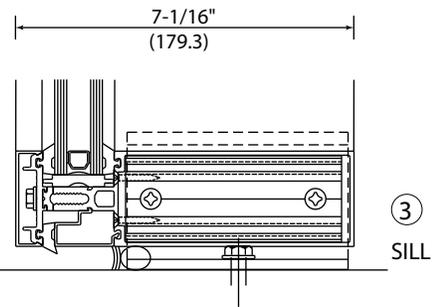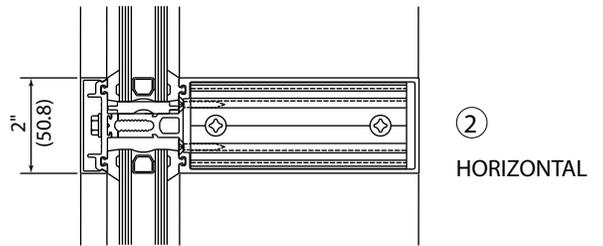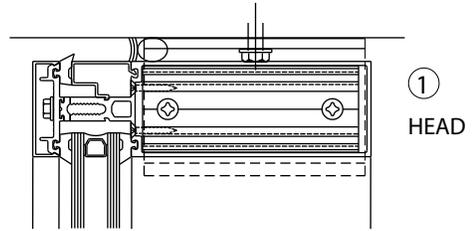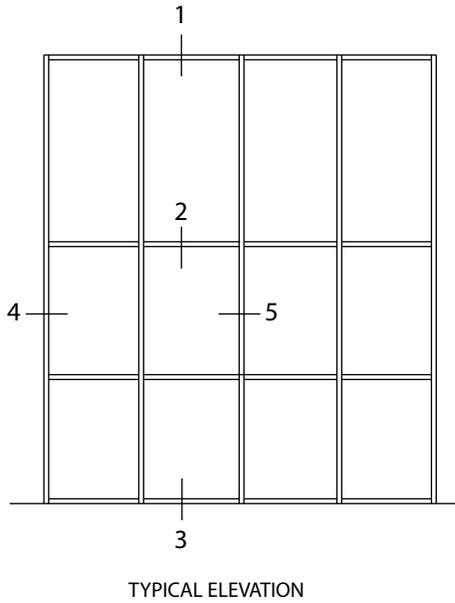

For Specifications, Details, and Testing Data go to usalum.com.

NOT TO SCALE