


NEW

CURTAIN WALLS

SERIES 3252 & 3252SG HIGH PERFORMANCE CURTAIN WALLS




- 2-1/2" (63.5 mm) Face Dimension
- 1" (25 mm) Insulating or 1/4" (6 mm) Glazing
- U-Factors from 0.53 to 0.30
- 7" (177.8 mm) Depth
- Exterior Glazed
- Injection Molded Water Deflectors and Closure Plates
- Two Thermal Break Points
- No Exposed Fasteners
- Vertically Butt Glazed Optional

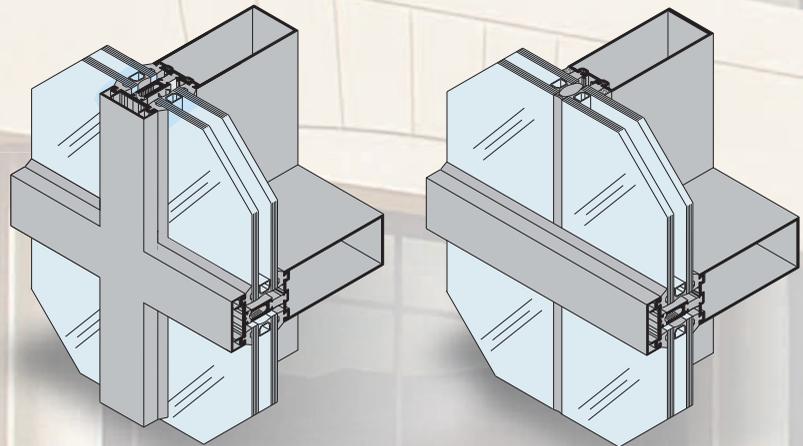


Complementing the efficiency of insulating glass, Series 3252 Curtain Wall Systems are thermally broken by a continuous Thermal Spacer interlocked with pressure plates and adds our Fill and Debridge Technology. The 3252 uses one Fill and Debridge pocket along with the Thermal Spacer, providing two Thermal Break Points. Dual colors can be achieved by specifying different finishes for the exterior face covers and interior mullions. Two piece horizontals and extruded Shear Blocks allow for a concealed horizontal to vertical joinery without exposed screws. These joint intersections also have concealed injection molded End Dams for controlling any infiltrated water.

CRL[®]
U.S. ALUMINUM


SERIES 3252 TYPICAL DETAILS

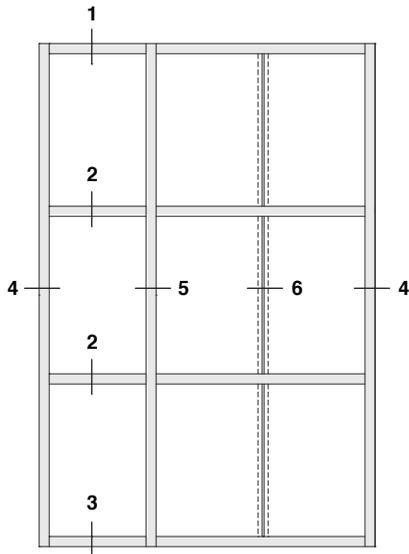

TYPICAL ELEVATION

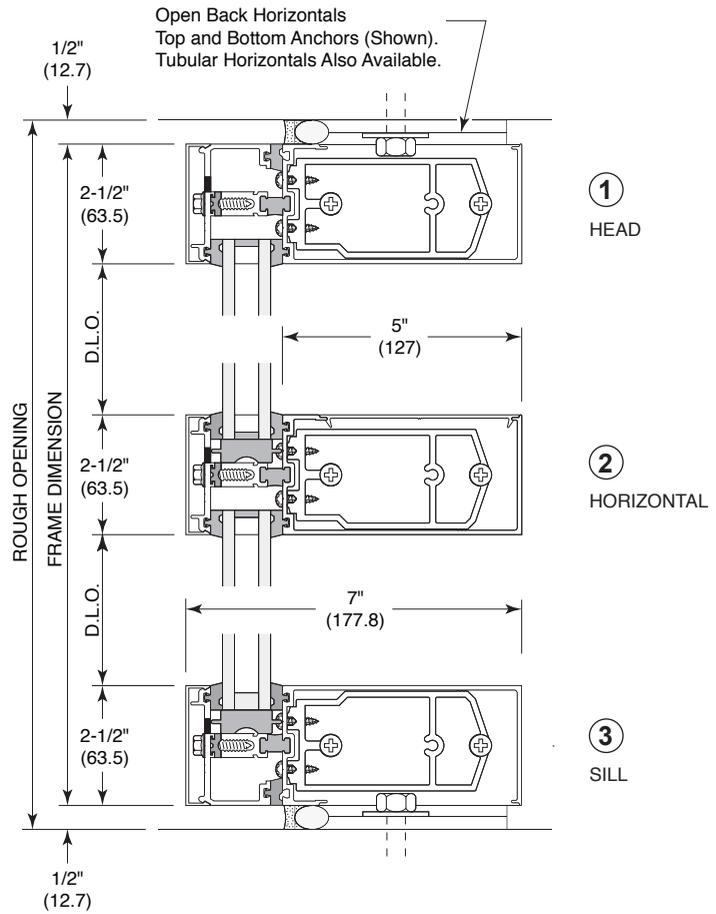

For Specifications, Details, and Testing Data go to usalum.com.

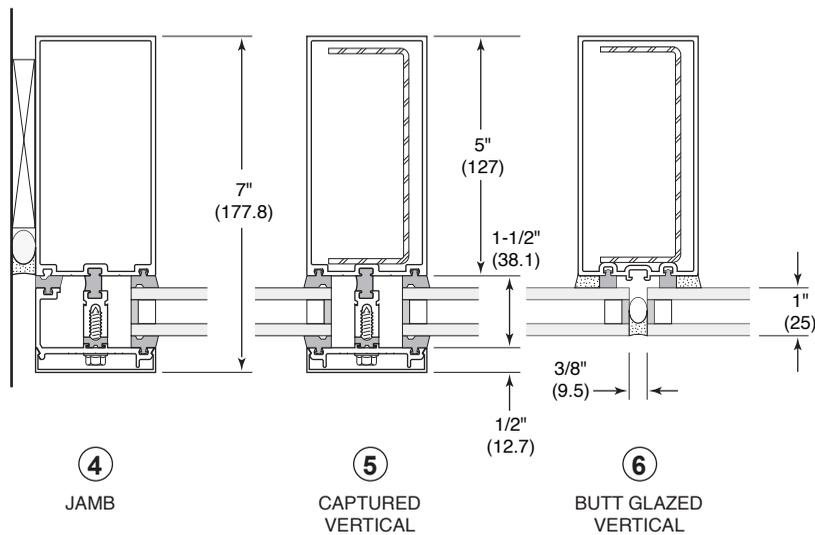

NOT TO SCALE



Phone Toll Free (800) 262-5151 Fax Toll Free (866) 262-3299 Web Site usalum.com