

WINDOWS

SERIES 8200

HORIZONTAL SLIDING WINDOW

US ALUMINUM




- Tested to AAMA CW60
- Thermally Insulated
- NFRC Certified
- U-Factors as Low as 0.34
- 4-1/2" (114 mm) Deep Frame to Match Typical Building Conditions
- Choice of Block or Fin Frame
- 1" (25 mm) Glazing
- Dry Glazed
- Self Locking Latch and Tandem Adjustable Rollers for Ease of Operation
- Accessories Such as Screens, Mulling Bars, Subsills, Head and Jamb Channels are Available
- Available in an Array of Architectural Coatings and Anodized Finishes
- Made in the USA



The 8200 Horizontal Sliding Window offers that rare combination of smooth operation, durability, and toughness. It has a 4-1/2" (114 mm) deep frame designed to match typical building conditions, including our entrances and storefronts. An efficient thermally insulated frame accepts 1" (25 mm) glazing. Available in an array of architectural coatings and anodized finishes.

SERIES 8200 HORIZONTAL SLIDING WINDOW TYPICAL DETAILS

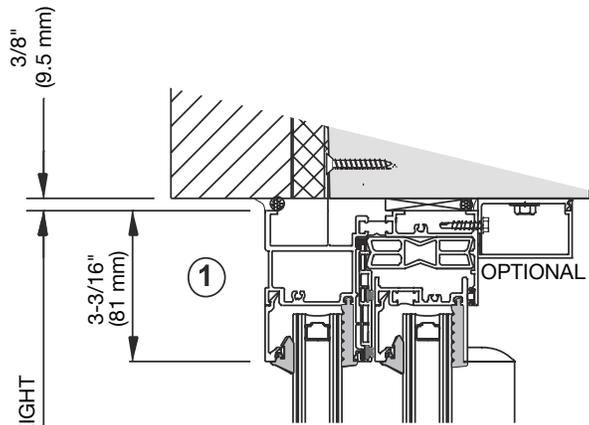

Maximum Frame Size
71" x 60" (1803 x 1524 mm)


A complete set of
details in DWG
format is available at
usalum.com

Meets or Exceeds Specifications:



- AAMA/WDMA/CSA 101/1.S.2/A 440 -08
 - ASTM E 283-04
 - ASTM E 330-02
 - ASTM E 331-00
 - AAMA 1503
- NFRC - NFRC 100-2004
 - NFRC 200-2004
 - NFRC 500-2004

NOTE:

1" (25 mm) Glazing Shown

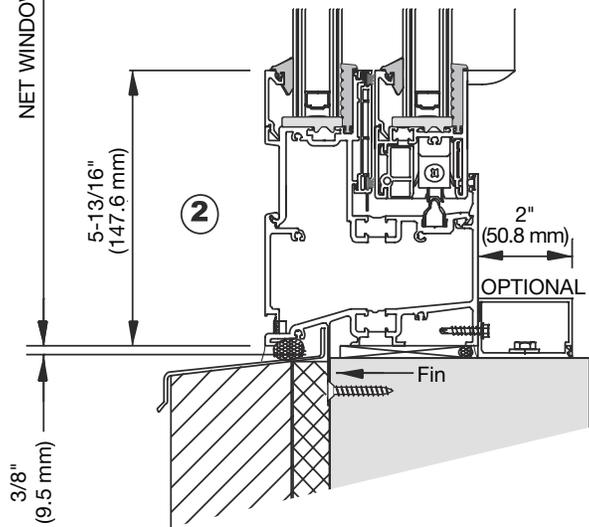

Fin Frame
Installation
Method Shown

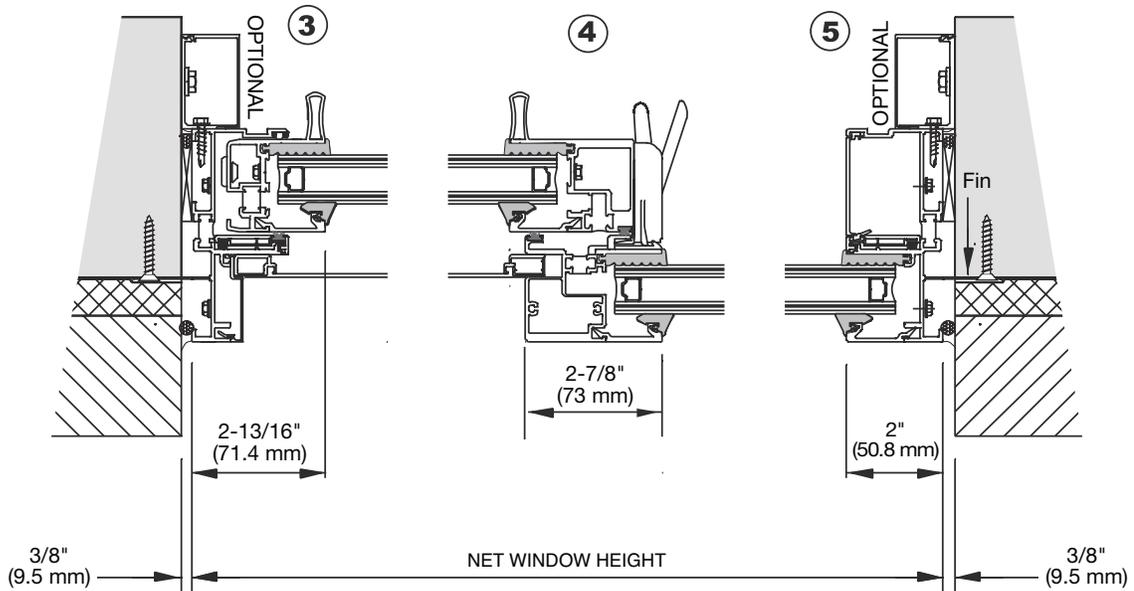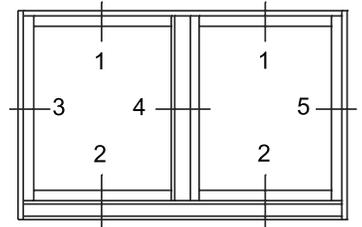

NOT TO SCALE